

## Product Information

REV202484

# TEALON TF 1580

### Description:

**TEALON TF 1580** is a structured PTFE - Gasket - Sheet manufactured by a unique process which provides a high level of fibrillation to overcome the creep relaxation and cold flow problems associated with normal (skived or moulded) PTFE sheets. **TEALON TF 1580** is produced from virgin PTFE resin filled with Barium Sulphate.

### Advantages:

- Universal gasket sheet for all applications. It is suitable for all types of flanges, nearly all media, a broad temperature range and even for applications with the toughest demands on purity. It is inherently clean and non-toxic.
- **TEALON TF 1580** is suitable for service with a wide variety of aggressive fluids, including hydrocarbons, moderate acids and strong caustics, solvents, water, steam, hydrogen-peroxide, refrigerants, oxygen etc.
- The high purity of this gasket sheet makes it excellently suitable for the food and pharmaceutical industry
- **TEALON TF 1580** is quick and simple to install. The used gasket can be removed easily and without residue.

### Properties:


- Color: off-white (no dye)
- Size: Sheets of 1500 mm x 1500 mm
- Thickness: 1.5 mm up to 3.2 mm (other thicknesses on request)
- Temperature: -268 °C to +260 °C
- Chemical resistance: chemically inert against all substances (pH 0-14), including the most aggressive lyes and moderate acids. The only exception are molten alkali metals and elemental fluorine at high temperature and pressure.
- Operating Pressure: 83 bar
- Ageing: **TEALON TF 1580** is not subject to ageing or weathering. It can be stored indefinitely.
- **TEALON TF 1580** complies to FDA requirements for food, is physiologically harmless and suitable for oxygen applications.

### Approvals:

- TA Luft
- Blow-Out
- DVGW
- FDA
- ABS
- EC 1935/2004 • EU 10/2011
- Chlorine Institute (Pamphlet 95)

### Tests:

- BAM
- EN13555

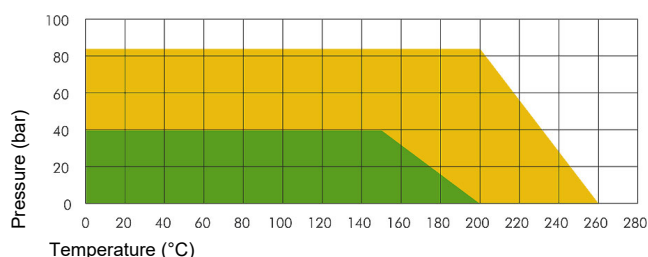

### P x T diagram:

The P x T diagram above indicates the service limits considering the simultaneous influence of pressure and temperature (chemical suitability assumed). The green area represents the normal service limits, while the orange-colored area shows the maximum application limits.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

TEADIT INTERNATIONAL PROD. GMBH - Europastraße 12, 6322 Kirchbichl, AUSTRIA,  
Tel.: +43-5332-74000, Fax: +43-5332-74000-120, [austria@teadit.com](mailto:austria@teadit.com), [www.teadit.com](http://www.teadit.com)

TEALON TF 1580		
Technical Parameters	Unit	TEALON TF 1580
Thickness	[mm]	0,50 - 3,20
Sheet dimensions	[mm]	1500 x 1500
Filler		Barium Sulphate
Color material		Off white
Color printing		Blue
Operating Temperature Range	[°C]	- 268 to + 260
Operating pressure	[bar]	Vacuum to 83
<b>Gasket factors acc. DIN28090-2</b>		
Compression (room temperature) $\epsilon_{KSW}$	[%]	>1,5
Creep relaxation (room temperature) $\epsilon_{KRW}$	[%]	>0,5
Compression (elevated temperature) $\epsilon_{WSW}$	[%]	<30
<b>Gasket factors acc. ASTM</b>		
Compressibility ASTM F 36M (34,5 MPa)	[%]	4 - 10
Recovery ASTM F 36M (34,5 MPa)	[%]	40
Creep ASTM F 38 (100 °C)	[%]	15
<b>Other Properties</b>		
Residual stress DIN 52913	MPa	16
Leakage rate TA Luft / VDI 2440	mbar*l/(s*m)	5,9*10-7
Leakage rate DIN 3535-6 (40bar, N2)	ml/min	<0,01
Tensile strength ASTM F 152	MPa	14
Gasket factor "m" ASTM		2 (for 2,0 mm)
Minimum gasket stress "y Stress" ASTM	psi	1500 (for 2,0 mm)

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

TEADIT INTERNATIONAL PROD. GMBH - Europastraße 12, 6322 Kirchbichl, AUSTRIA,  
Tel.: +43-5332-74000, Fax: +43-5332-74000-120, [austria@teadit.com](mailto:austria@teadit.com), [www.teadit.com](http://www.teadit.com)